

Technical Fitment Instructions


Instruction # 15000



www.GreenFilterUSA.com

Why Use Trim-able Custom Centering Tabs on Flat Filters?


- *Custom centering tabs are molded into the sides of the filter, in the rubber.
- *These custom centering tabs are used for aligning the air filter in the lower part of the air box.
- *The tabs are also used to custom fit the filter to your air box, some air boxes (being plastic) can be deformed because of heat in the engine bay.
- *Depending on vehicle, it may be necessary to cut one stage, two stages or none of the custom centering tabs.
- *To do this, place the filter in the air box and check to see how the filter fits. If the tabs are too long first cut stage one and try to fit again. If still too long cut stage two.

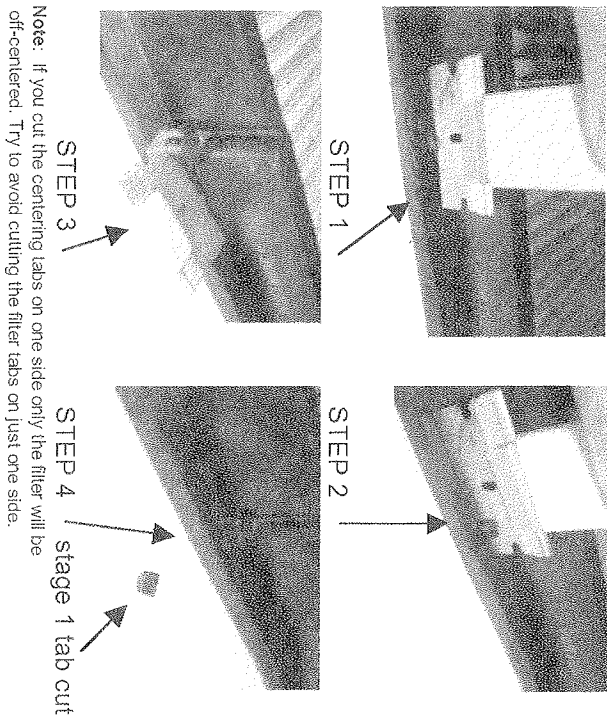

Note: If you cut the centering tabs on one side only the filter will be off-centered. Try to avoid cutting the filter tabs on just one side.

VEHICLE WARRANTY INFORMATION

Green Filter will NOT void your vehicle's warranty. Due to the Magnuson -Moss Warranty Act of 1975 a manufacturer cannot void a vehicle's warranty because a performance replacement air filter is used. This is called a tie-in sale. Which means a manufacturer cannot require the use of a certain brand of filter. The only exception to this is on the condition they provide the air filter for free. If the filter is not free it is illegal for the manufacturer to void the vehicle's warranty. To contact the Federal Trade Commission call 1-877-FTC-HELP.

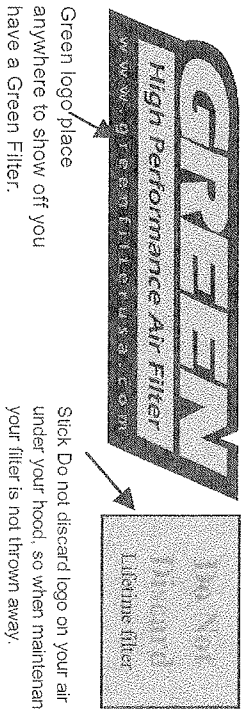

Technical Fitment Instructions


Instruction # 15000



www.GreenFilterUSA.com

Why Use Trim-able Custom Centering Tabs on Flat Filters?


- *Custom centering tabs are molded into the sides of the filter, in the rubber.
- *These custom centering tabs are used for aligning the air filter in the lower part of the air box.
- *The tabs are also used to custom fit the filter to your air box, some air boxes (being plastic) can be deformed because of heat in the engine bay.
- *Depending on vehicle, it may be necessary to cut one stage, two stages or none of the custom centering tabs.
- *To do this, place the filter in the air box and check to see how the filter fits. If the tabs are too long first cut stage one and try to fit again. If still too long cut stage two.

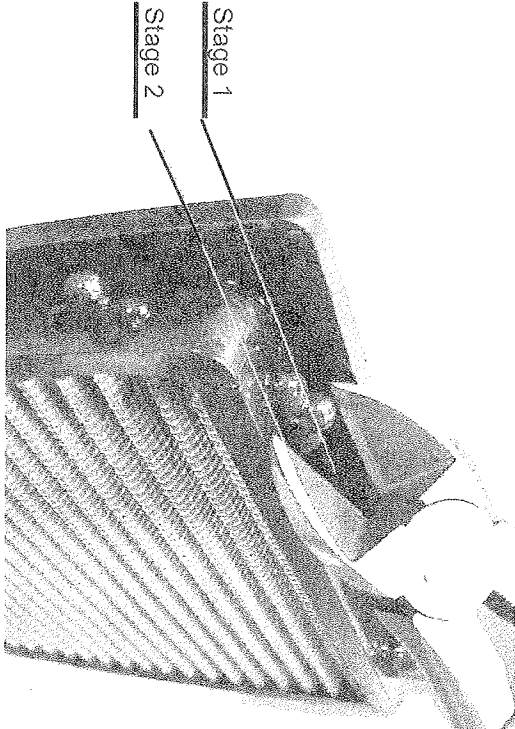

Note: If you cut the centering tabs on one side only the filter will be off-centered. Try to avoid cutting the filter tabs on just one side.

VEHICLE WARRANTY INFORMATION

Green Filter will NOT void your vehicle's warranty. Due to the Magnuson -Moss Warranty Act of 1975 a manufacturer cannot void a vehicle's warranty because a performance replacement air filter is used. This is called a tie-in sale. Which means a manufacturer cannot require the use of a certain brand of filter. The only exception to this is on the condition they provide the air filter for free. If the filter is not free it is illegal for the manufacturer to void the vehicle's warranty. To contact the Federal Trade Commission call 1-877-FTC-HELP.

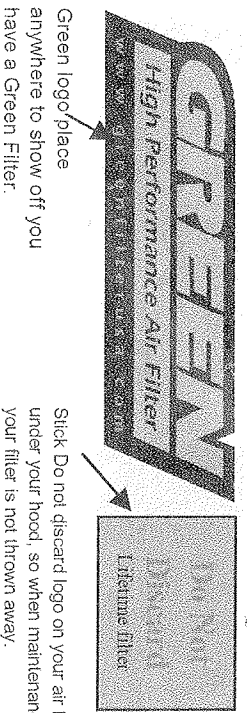

Be sure to only use Green Filter cleaner and oil. Kit #2000

GREENTM
High Performance Air Filter USA

www.GreenFilterUSA.com

Cleaning Instructions

1. First preclean by brushing the inside and outside of the filter to remove the dirt and dust that has been trapped in the filter (if using an air compressor be sure the filter is a safe distance (2-3 ft) so the cotton is not damaged.)
2. Spray the filter with green filter cleaner. Allow the solution to soak into the filter for about 15 minutes. Or dilute the cleaner in a bucket of water and soak the filter.

*Never use strong detergents, high pressure water, or gasoline.

3. Rinse the filter with warm water, inside first and then outside. (let the water run from the clean side to the dirty side.)

4. Allow the filter to dry. It is best to allow the filter to dry naturally. Don't use heat this might shrink the cotton.


5. Re-oil the filter using Green Filter oil. Don't use other cotton filter

* Never use Green filters with out oil

* Do not over oil the filter this may cause damage to sensors in the air intake.

* Never use motor oil, transmission fluid, WD 40. (That may cause problems with sparks and back fires)

IMPORTANT

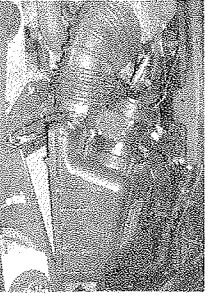

HINT: If you are having problems fitting the top of your air box back on, loosen the tube connecting the air box to the engine. By inserting the clips at more of an angle it is easier to close.